

StormFLO® by Vinidex

A durable, high-performance
PE stormwater and drainage pipe.




StormFLO range is available at Reece.

Introducing StormFLO® by Vinidex

As leaders in manufacturing and advanced pipeline systems, we're constantly innovating our products to improve performance and meet the needs of our customers.

StormFLO is a durable twin-wall corrugated polyethylene pipe for non-pressure stormwater and drainage applications. Used in projects across Australia, StormFLO is safe and easy to handle, durable and lasting, and approved by authorities, making it the proven performer for your next project.

StormFLO by Vinidex is made right here in Australia and designed for all Australian conditions.

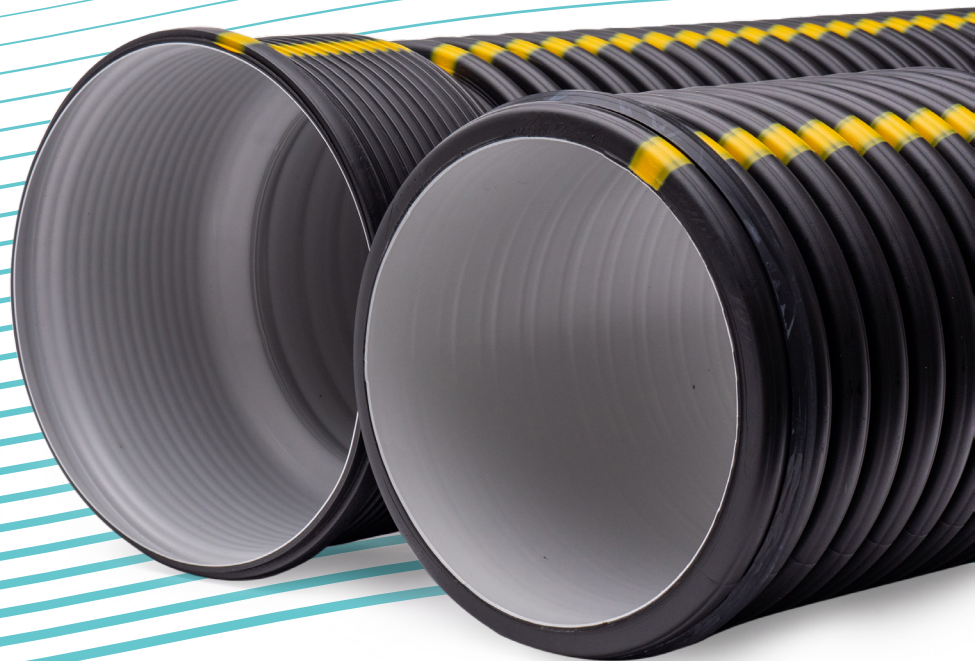

Key features and benefits of StormFLO twin-wall PE pipes



Uncompromising performance

StormFLO is made to stringent Australian Standards (AS/NZS 5065) and has excellent hydraulic performance.



Safe and easy to handle

StormFLO is lighter than concrete pipe, easy to handle, and produces no silica dust when cut.



Durable and lasting

StormFLO has a 100-year design life and is recyclable at the end of life, making it a sustainable solution that stands the test of time.



Includes up to 65% recycle

Every length of StormFLO pipe contains at least 30%, and up to 65% of post-consumer recycle that may otherwise go to landfill, making it an environmentally sound choice.



Tested for 100-year design life

Vinindex is the only Australian manufacturer using the UCLS test method to ensure StormFLO meets its 100-year design life requirements, even with the inclusion of recycle.



Approved by authorities

StormFLO has been approved for use by several road and rail authorities nationally, making it the trusted name in underground stormwater pipe solutions.



Australian made

StormFLO is locally made for all Australian conditions.



Available through Reece stores

StormFLO is available at selected Reece Civil stores. Get the best of both worlds – the industry benchmark in service with the versatility of StormFLO pipes.

Construction applications



Land development

Ground drainage, stormwater for sub-divisions and new residential development.



Rail

Stormwater run-off.



Plumbing

Commercial and domestic.



Roads

Infrastructure, stormwater, asset renewal.



Mining

Stormwater and aggressive ground.



Rural

Culverts and land drainage.

Discover the benefits of recycled twin wall PE pipes over traditional concrete pipes

StormFLO by Vinidex provides a variety of benefits that traditional concrete pipes cannot match.

More versatile

StormFLO pipes are more versatile than concrete pipes. Under the right conditions, Vinidex SN8 pipe can be used as an alternative to multiple classes of concrete pipes.

Lightweight for fast installation

Unlike heavy concrete pipe alternatives, StormFLO plastic pipes are lighter and more flexible, resulting in faster installation times that deliver additional cost saving benefits.

Smooth and efficient water flow

StormFLO pipes have a smoother internal surface, increasing the efficiency of water flow and reducing the pipe size diameter required compared to traditional concrete pipes.

Flexible and durable

Unlike concrete pipes that must be capable of fully supporting any applied loading, when StormFLO pipes are subjected to loading, the pipe will initially deflect and take advantage of the lateral pressure provided by the surrounding soil. After initial settlement, there is no further increase in pipe deflection.



Case study

North Eastern Link Project (NELP)

North East Link (NEL) is Victoria's largest road investment and part of the state's 'Big Build' project, addressing crucial gaps in greater Melbourne's transport network. The project is designed to connect the Metropolitan Ring Road (M80) and Eastern Freeway (M3) and includes upgrades to the Eastern Freeway as well as the construction of twin 6.5km tunnels between Watsonia and Bulleen and new interchanges.

Vinidex partnered with Spark to implement the first trial in Australia of StormFLO Civil under a trafficable road, aiming to demonstrate the suitability of a sustainable engineered solution for the Department of Transport and Planning (DTP) road network.

Testing involved installation of StormFLO in a road pavement crossing, in a high volume and heavy load temporary site access

road and assessing the performance of the flexible plastic pipes at regular intervals during the trial period. Vinidex was present at the critical part of the installation, providing additional CCTV monitoring during and after the construction of the temporary road.

The trial was regarded as a great success – from StormFLO's ease of installation, requiring less mechanical movement than traditional options, to the excellent overall performance of the pipe recorded at each inspection.

The trial demonstrated that a twin-wall pipe containing external recycle, when manufactured to the Australian Standards, and used in the right application, is a smart and sustainable solution for under-road pavement applications.

Learn more and watch the project video at vinidex.com.au

StormFLO Specification Guide

StormFLO Twin-wall PE pipe specification

StormFLO Dimensional data and specs										Lubrication per joint			
SKU	Pipe Dia. (mm)	Pipe OD (mm)	Pipe ID (mm)	Socket OD (mm)	Socket ID (mm)	Socket depth (mm)	Pipe length (m)	Effective length (m)	Weight / Length (kg)	Diameter	Approx. Joints/ 500ml	Approx. Joints/ 1kg	Approx. ml/ Joint
29520	225	252	218	262	256	137	6.10	5.96	19	225	13	26	38
29521	300	344	294	356	348	179	6.05	5.88	29	300	9	19	56
29522	375	423	363	440	430	231	6.02	5.79	47	375	8	15	63
29523	450	504	435	522	510	230	6.00	5.78	73	450	6	12	83
29524	525	601	519	621	608	278	5.96	5.69	100	525	5	10	100
29525	600	688	589	711	699	345	5.90	5.56	113	600	4	8	125

Construction loading

The table below shows the minimum cover requirements for StormFLO for short-term construction loading.

SKU	DN	Vibratory Rammer 75kg	Vibratory Smooth Drum Roller 7T	15T Excavator with Compaction Wheel	Vibratory Trench Roller 2T	Vibratory Smooth Drum Roller 10T	25T Excavator with Compaction Wheel
29520	225	500mm	500mm	500mm	500mm	500mm	700mm
29521	300	500mm	500mm	500mm	500mm	500mm	700mm
29522	375	500mm	500mm	500mm	500mm	500mm	700mm
29523	450	500mm	500mm	500mm	500mm	500mm	700mm
29524	525	500mm	500mm	500mm	500mm	550mm	750mm
29525	600	500mm	500mm	500mm	500mm	550mm	750mm

Minimum cover for long term loading

The minimum pipeline cover should be selected to ensure design live loads (long-term traffic and short-term construction equipment) are not concentrated, but instead are distributed over an adequate area. Structural design calculations to AS/NZS 2566.1 can be carried out to determine the required minimum cover or alternatively, AS/NZS 2566.2 provides guidance in the table below:

Minimum cover H*	Minimum cover H*mm
Not subjected to vehicle loading	300
Land zoned for agriculture	600
Subject to vehicular loading -	
a) no carriageway;	450
b) sealed carriageway; and	600
c) unsealed carriageways	750
Pipelines in embankments or subject to construction equipment loads	750

*Subject to variation by relevant asset owner. Under cultivated agriculture land H should not be less than 0.6m. Railway crossings shall comply with AS 4799.

Leading the way, from the ground up.

For over six decades, we've been leading the way – setting the industry benchmark for pipeline systems and solutions. Our legacy spans across building, infrastructure, and agriculture sectors. We make life flow with groundbreaking, high-quality products, connecting everything from water, gas and energy throughout Australia.

Today, we maintain our commitment to innovative solutions that meet our customers' needs and exceed their expectations. Core to our approach are smarter solutions that are more sustainable throughout the manufacturing process and over their lifetime. Globally backed by Aliaxis, and a wide-reaching national footprint, our team of passionate technical experts support our customers throughout their projects –working to deliver solutions for today and the future.

Vinidex. We make life flow.

Limitation of Liability

This product catalogue has been compiled by Vinidex Pty Limited ("the Company") to promote better understanding of the technical aspects of the Company's products to assist users in obtaining from them the best possible performance. The product catalogue is supplied subject to acknowledgement of the following conditions:

1 The product catalogue is protected by copyright and may not be copied or reproduced in any form or by any means in whole or in part without prior consent in writing by the Company. 2 Product specifications, usage data and advisory information may change from time to time with advances in research and field experience. The Company reserves the right to make such changes at any time without further notice. 3 Correct usage of the Company's products involves engineering judgements, which can not be properly made without full knowledge of all the conditions pertaining to each specific installation. The Company expressly disclaims all and any liability to any person whether supplied with this publication or not in respect of anything and all of the consequences of anything done or omitted to be done by any such person in reliance whether whole or part of the contents of this publication. 4 No offer to trade, nor any conditions of trading, are expressed or implied by the issue of content of this product catalogue. Nothing herein shall override the Company's Condition of Sale, which may be obtained from the Registered Office or any Sales Office of the Company. 5 This product catalogue is and shall remain the property of the Company, and shall be surrendered on demand to the Company. 6 Information supplied in this product catalogue does not override a job specification, where such conflict arises; consult the authority supervising the job. © Copyright Vinidex Pty Limited.

Vinidex Pty Limited
ABN 42 000 664 942

HEAD OFFICE
Level 4, 26 College Street
Darlinghurst NSW 2010
PO Box 747, Darlinghurst, NSW, 1300

Customer Service
Phone: 13 11 69
Fax: 13 24 43
Email: sales@vinidex.com.au
Web: www.vinidex.com.au



**SCAN TO
FIND OUT
MORE**